

Thank you for purchasing the UCView View Media 10 player. Please match the items on the list below with the items in the box. If any item is missing or damaged, please contact your UCView Media Networks sales representative immediately.

- One (1) View Media 10 player
- One (1) Power supply
- One (1) Cable cord
- One (1) Antenna

Installing your VM 10 Player **1**

- 1** Remove packaging - make sure box and plastic casings are stored away in case a return is necessary.
- 2** Plug in the LAN/Ethernet cable into the VM 10 player.
- 3** Plug in your video source, HDMI or VGA cable, into the VM 10 player and the monitor.
- 4** Plug in the Power cable into the VM 10 player.
- 5** Attach the antenna, which is included in your package, to your VM 10 player.



LAN/Ethernet



HDMI



VGA



Power



HDMI (High-Definition Multimedia Interface): A single cable which is capable of transmitting high - definition video and high - resolution audio.

DVI (Digital Video Interface): A cable which is capable of providing digital video signal.

VGA (Video Graphics Array): An analog cable which enables connection from your computer to a monitor.

LAN/Ethernet: A LAN/Ethernet cable can connect to devices over a local area network, such as PCs and routers.




Note: Image depicts the back portion of the VM 10 player. Please connect your cable to the appropriate receptacle labeled below. Images are subject to change without notice.



- ① Antenna ② USB port ③ VGA ④ HDMI ⑤ LAN/Ethernet ⑥ Power


- 6 Once the appropriate cables are securely attached to both the VM 10 player and the monitor, firmly press the power button, which is located in front of the VM 10 player.
- 7 Select the correct video input source on your monitor. The Display Password will appear on the screen.

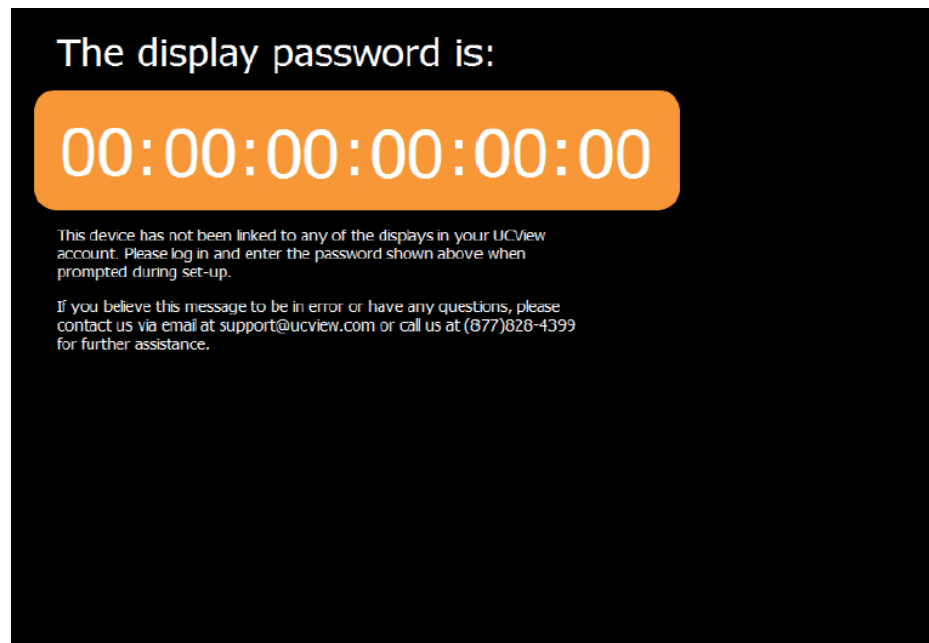

Using your VM 10 Player 2

- 1 Move over to your workstation to access your management tool.
- 2 Locate the PC you will be using to monitor your digital signage network.

- 3 Open up an Internet browser.
- 4 Type in portal.ucview.com (or your server's address) in the address bar.
- 5 A login screen will appear.

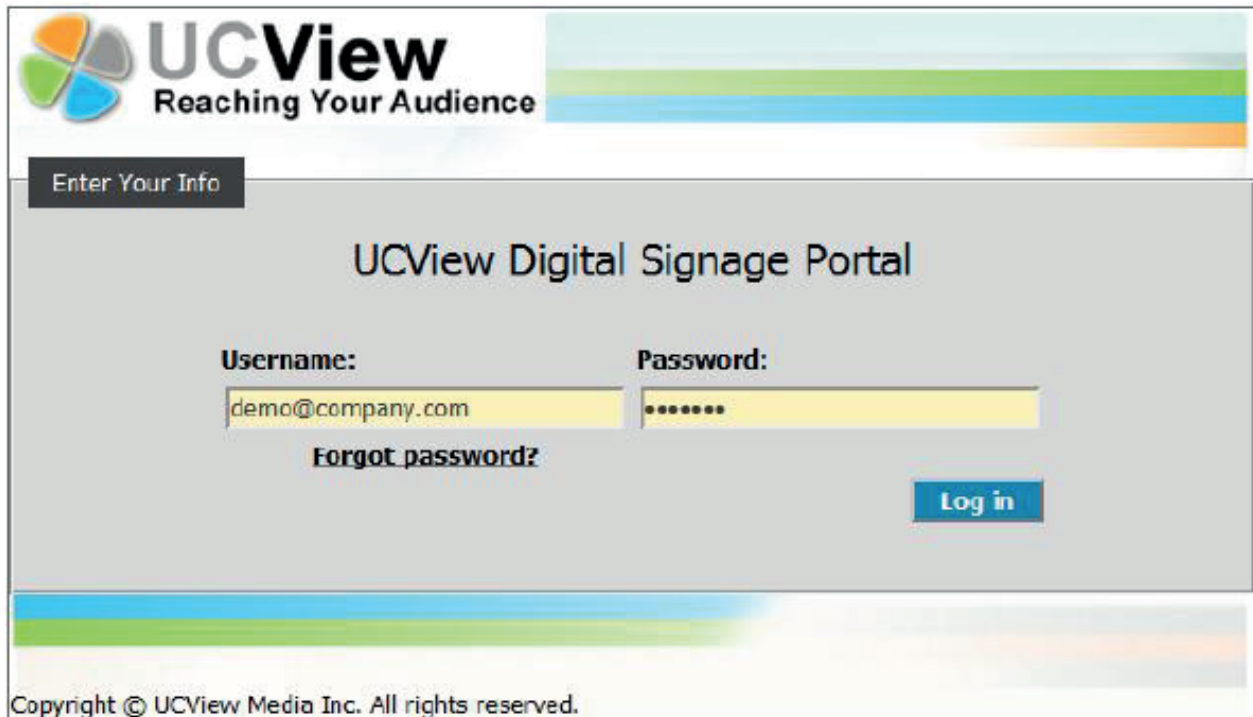

The image shows the login page of the UCView Digital Signage Portal. At the top, there is a logo with four colored circles (orange, green, blue, grey) and the text "UCView Reaching Your Audience". Below the logo is a dark grey button labeled "Enter Your Info". The main heading is "UCView Digital Signage Portal". Underneath, there are two input fields: "Username:" with the text "demo@company.com" and "Password:" with a masked password "*****". A link "Forgot password?" is located below the password field. A blue "Log in" button is on the right. At the bottom, it says "Copyright © UCView Media Inc. All rights reserved."

- 5 Once you press enter, the user interface displaying EZBoard, Campaigns & Ads, etc., will appear.



The image shows the "Campaigns: Demo Campaign: Main Media" interface. On the left is a green sidebar with navigation links: Content (Campaigns & Ads, EZBoard, Store, Analysis), Management (Reports, Dashboard, Content Affiliates, Departments & Users, Display layouts, Global alerts, Tags, Locations & Displays), and Support (Announcements, Search, My settings, Video Tutorials, Support Ticket, Download client installer). The main area has a header with "Department: Christine's" and "Logged in as My announcements(0) Log out". The title is "Campaigns: Demo Campaign: Main Media" with buttons for "Pause", "Delete", and "Users permissions". Below the title are tabs for "Detail" and "Advanced". The "Detail" tab is active, showing fields for Name (Main Media), Section (Main Media), Duration (30 Seconds), Affiliate (None), and Volume (50). There is a "Media" section with a dropdown set to "News", a "Type" dropdown set to "Traffic Map", a "Provider" dropdown set to "Google", and a "Zip Code or Address" field set to "90004". A "Zoom" dropdown is set to "10". There are "Save" and "Cancel" buttons. Below this are sections for "Dates" and "Times", each with a checkbox for "Date details" and "Time Details" respectively, and a "Delete" button. On the right, there is a "Layout preview" section showing a map of Los Angeles with various banner placements labeled: "Main Media", "Side Banner", and "Bottom Banner".

- 9 Open up an Internet browser.
- 10 Type in portal.ucview.com (or your server's address) in the address bar.

The screenshot displays the UCView portal interface. At the top, it says "EMPLOYMENT SOLUTION" and "12:30:56 P.M.". The main content area is divided into three sections:

- INFORMATION:** A video player showing two female athletes in purple leotards and white capes, likely from a performance. The NBC logo is visible in the bottom left corner of the video.
- AT A GLANCE:** A weather widget for Beaver, WV, showing current conditions (82° Mostly Cloudy) and a 5-day forecast.

Thu	Fri	Sat	Sun	Mon
67° - 78°	64° - 80°	64° - 78°	67° - 83°	67° - 78°
Isolated Thunderstorms	Scattered Thunderstorms	Partly Cloudy	Partly Cloudy	Partly Cloudy
- JOB INFORMATION:** A section titled "Job Openings" listing several positions:

Level 2 Computer Tech	Qualifying Phase	Salary	Apply
Senior Computer Tech Support Analyst <td>Interview <td>\$12.00 - \$15.00</td> <td>Apply</td> </td>	Interview <td>\$12.00 - \$15.00</td> <td>Apply</td>	\$12.00 - \$15.00	Apply
Entry-Level Computer Tech Professional	Interview <td>\$12.00 - \$15.00</td> <td>Apply</td>	\$12.00 - \$15.00	Apply
Entry-Level Computer Tech Professional	Interview <td>\$12.00 - \$15.00</td> <td>Apply</td>	\$12.00 - \$15.00	Apply
Entry-Level Computer Tech Professional	Interview <td>\$12.00 - \$15.00</td> <td>Apply</td>	\$12.00 - \$15.00	Apply

- 11 See user manual or video tutorials for more information.



18425 Napa St
Northridge, CA 91325
Tel: 1-818-772-8255
Toll Free: 1-877-828-4399
Fax: 1-818-772-7901
Email: sales@ucview.com
leah@ucview.com