



ViewEdge 500

The ViewEdge 500 Digital Signage Appliance is our most powerful, fully integrated hardware and software solution for providing web-based management and media distribution. With complete control of up to five hundred media players, the ViewEdge 500 is an ideal choice for multi-location signage networks controlling and installation.


One Digital Signage Appliance can seamlessly distribute: Live TV, web pages, Flash media, PowerPoint presentations, RSS feeds and multiple video, image and audio formats.

With no software to install or network modifications to perform, setting up a UCView Digital Signage Media Server is simple and hassle-free.

- One ViewEdge 500 appliance can control as many as 750 media players, operating anywhere in the world.
- Self-contained hardware and software solution that minimizes maintenance and complicated installation/administration issues.
- Compatible with Intranet, Internet, and V-LAN connections.
- Web-based administration: Manage campaigns, content, layouts and displays using any web-enabled device from anywhere in the world.
- Cluster multiple Server Appliances to increase capacity and availability. Installing additional units is as simple as installing the first one.
- Schedule content delivery on the fly or weeks in advance.
- Unlike software-only solutions, the UCView Digital Signage Network increases system performance by centralizing the process and management to multi-user enterprise environments.
- Updates and fixes are delivered automatically with no additional administration.





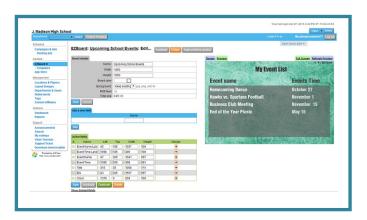

ViewEdge 500 - Specifications

Hardware Specifications:

CPU: 3.3GHz Intel Xeon Processor

Hard Drive: 2 x 1TB Hard Drive

Chipset: LGA1155Memory: 8GB DDR3

Graphics: VGA

Network: 2 LAN (10/100/1000)
Interface: Web and Console
Dimensions: 1 RU, 17" x 11" x 1"

System Features:

Administration:

- Web based interface console for IP management
- Console for IP management
- User account administration
- Reports and statistics
- Remote display management
- Display failure notification
- Secure remote administration
- Full-user security module

Hardware Features:

Connections:


- 1 VGA Connector
- 1 Ethernet 10/100/1000
- 2 USB
- 2 PS/2 (Keyboard/Mouse)

Power Requirements:

- AC 100-200 Volt
- 250 W

End Users/Advertisers:

- Web-based interface
- Full campaign and ad management
- Reports and statistics

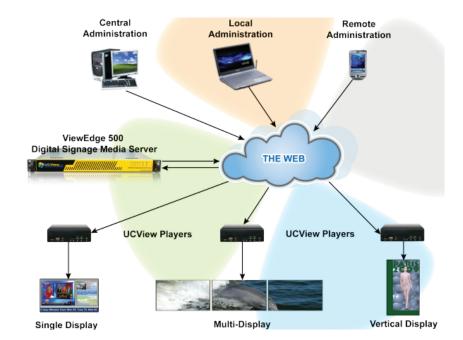

18425 Napa Street Northridge, CA 91325 Office: 818-772-8255 Fax: 818-772-7901 www.ucview.com